

PANEL RELAYS AND ACCESSORIES

YPT DIN RAIL MOUNT WITH SCREW TERMINALS CONVENTIONAL VERSION



YPT78704


SCHRACK-INFO

- High-quality, contact-reliable terminals
- Captive terminal screws


APPROVALS



DIMENSIONS (mm)

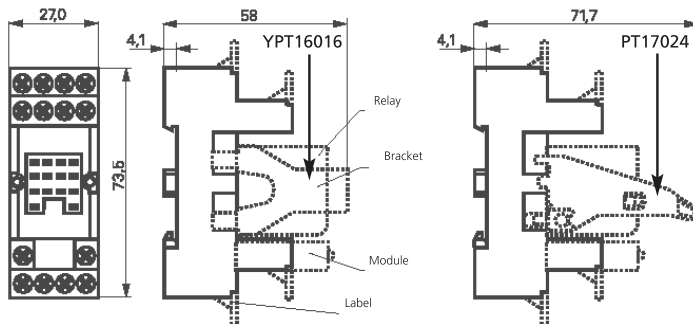

REDUCTION CURVE

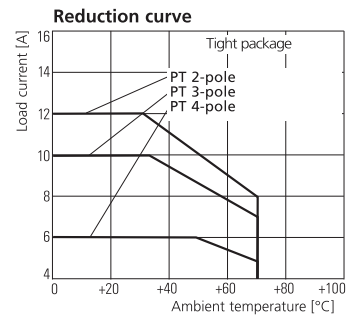

TECHNICAL DATA

		2-POLE	3-POLE	4-POLE
Rated current		12 A	10 A	6 A
Limiting continuous current		See reduction curve		
Rated voltage / max. switching voltage		AC 250 V~		
Dielectric strength	Coil/contact set	2500 V _{eff}	2500 V _{eff}	2500 V _{eff}
	Open contact	1200 V _{eff}	1200 V _{eff}	1200 V _{eff}
	adjacent contacts	2500 V _{eff}	2500 V _{eff}	2000 V _{eff}
Terminals		Screw terminals		
Terminal torque according to IEC 61984		0.5 Nm		
max.		0.7 Nm		
Terminal capacity	Copper wire	2 x 2.5 mm ²		
	Stranded wire	2 x 2.5 mm ²		
	with ferrule (DIN 46228/1)	2 x 1.5 mm ²		

DESCRIPTION	FOR RELAY TYPE	EAN CODE	AVAILABLE	ORDER NO.
DIN rail mount with screw terminals, 2-pole	PT2x	9004840152913		YPT78702
DIN rail mount with screw terminals, 3-pole	PT3x	9004840228878		YPT78703
DIN rail mount with screw terminals, 4-pole	PT5x	9004839900341		YPT78704
DIN rail mount with screw terminals, 4-pole with protection diode	PT5x with DC coil	9004839900358		YPT78110
Fixing clip	PTx	9004839902529		YPT16016
Retaining clip with eject function	PTx	9004840617016		PT17024
Jumper bar, 6-fold	-	9004840617023		PT170R6
Marking tag	-	9004839902512		YPT16040



Order no. blue: on stock, usually ready for delivery on the day of order!